







- Opening Angle : 165°
- Cup Diameter : 35 mm
- Cup Depth : 11,2 mm
- Hinge Body : Zamac+Steel
- Hinge Cup : Steel
- Crank Type : 0-9-18 mm
- Finish : Nickel
- Packaging : 125 Pieces
- Tool free and simple assembling and disassembling of the cabinet doors. Only one touch on the Track mechanism is enough to release and fix the cabinet doors.

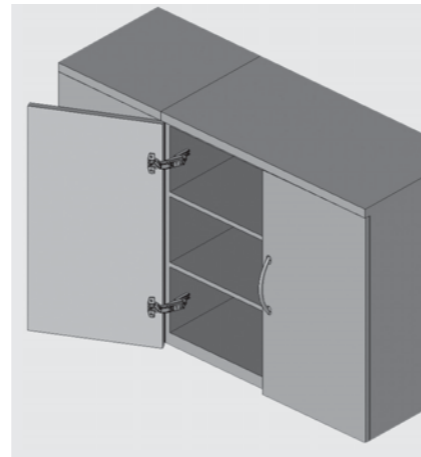

| Cranking 0 mm | |
|---|----------|
| Code List According to Cup Connection Types | |
| DEFINITION | CODE |
| Chipboard Screw 45 mm | 1019011 |
| Ø 8 Dowel 45 mm | 10190112 |
| Ø10 Dowel 45 mm | 10190113 |
| Spax Screw 45 mm | 10190111 |
| Chipboard Screw 48 mm | 1019031 |
| Ø8 Dowel 48 mm | 10190312 |
| Ø10 Dowel 48 mm | 10190313 |
| Spax Screw 48 mm | 10190311 |
| Chipboard Screw 52 mm | 1019041 |
| Ø8 Dowel 52 mm | 10190412 |
| Ø10 Dowel 52 mm | 10190413 |
| Spax Screw 52 mm | 10190411 |

| Cranking 9 mm | |
|---|----------|
| Code List According to Cup Connection Types | |
| DEFINITION | CODE |
| Chipboard Screw 45 mm | 1019461 |
| Ø 8 Dowel 45 mm | 10194612 |
| Ø10 Dowel 45 mm | 10194613 |
| Spax Screw 45 mm | 10194611 |
| Chipboard Screw 48 mm | 1019471 |
| Ø8 Dowel 48 mm | 10194712 |
| Ø10 Dowel 48 mm | 10194713 |
| Spax Screw 48 mm | 10194711 |
| Chipboard Screw 52 mm | 1019481 |
| Ø8 Dowel 52 mm | 10194812 |
| Ø10 Dowel 52 mm | 10194813 |
| Spax Screw 52 mm | 10194811 |

| Cranking 18 mm | |
|---|----------|
| Code List According to Cup Connection Types | |
| DEFINITION | CODE |
| Chipboard Screw 45 mm | 1019491 |
| Ø 8 Dowel 45 mm | 10194912 |
| Ø10 Dowel 45 mm | 10194913 |
| Spax Screw 45 mm | 10194911 |
| Chipboard Screw 48 mm | 1019501 |
| Ø8 Dowel 48 mm | 10195012 |
| Ø10 Dowel 48 mm | 10195013 |
| Spax Screw 48 mm | 10195011 |
| Chipboard Screw 52 mm | 1019511 |
| Ø8 Dowel 52 mm | 10195112 |
| Ø10 Dowel 52 mm | 10195113 |
| Spax Screw 52 mm | 10195111 |

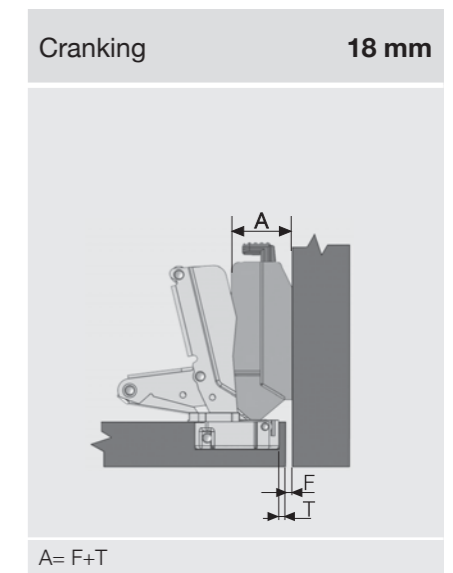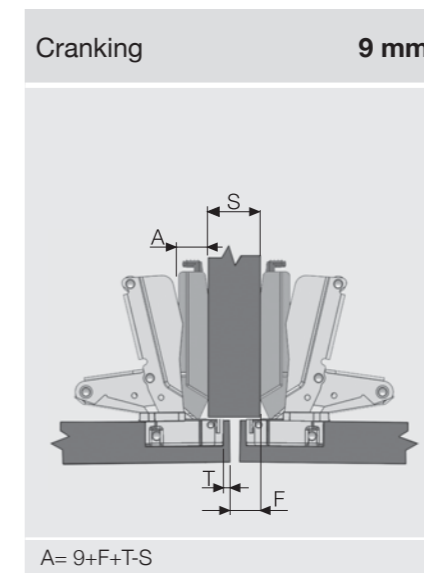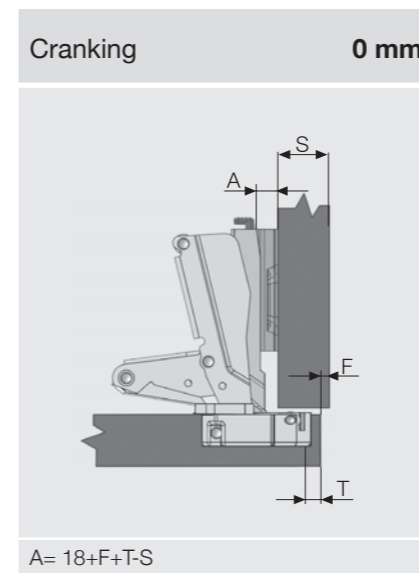

Calculation Table

| Cranking 0 mm | | Cranking 9 mm | | Cranking 18 mm | |
|---------------|-----------------------|---------------|----|----------------|---|
| S | Wall Thickness | 18 | 16 | | |
| A | Thickness of Distance | 5 | 7 | 7 | 9 |
| F | Minimum Gap | 1 | 1 | 2 | 1 |
| T | Cup Distance | 4 | 6 | 5 | 4 |

| Cranking 9 mm | | Cranking 18 mm | |
|---------------|-----------------------|----------------|----|
| S | Wall Thickness | 18 | 16 |
| A | Thickness of Distance | 5 | 7 |
| F | Minimum Gap | 10 | 11 |
| T | Cup Distance | 4 | 5 |

| Cranking 18 mm | | | |
|----------------|-----------------------|---|---|
| A | Thickness of Distance | 5 | 7 |
| F | Minimum Gap | 1 | 2 |
| T | Cup Distance | 4 | 5 |

Screw Options

| | |
|-------------------------------------|--|
| Ø3,5x16 mm Countersunk Headed Screw | |
| Spax Screw | |
| Euro Screw | |
| Ø8-10 mm Plastic Dowel | |

Page Directions

| | |
|------------------------------|----------|
| Mounting Plates | page 170 |
| Mechanisms | page 192 |
| Distances | page 212 |
| Decorative Covers | page 218 |
| Assembly | page 224 |
| Dimension Charts and Symbols | page 226 |

