

hinge systems

Push-Open Long Latch and Adapter



- Used with unsprung and standard hinges.
- Min. gap 2.6 mm.
- For eliminating assembling errors it provides 4mm adjusting distances.
- It can be assembled in cabinet by using long latch adapter coded 10299921.
- It can be assembled by drilling on face of cabinet.









Push-Open Long Latch

Colour	Packing	Code
Grey	Each	10299924

Push-Open Door Magnet

Colour	Packing	Code
Nickel	Each	10299926

Dimensions

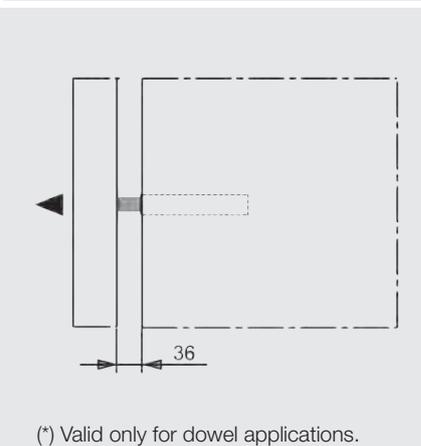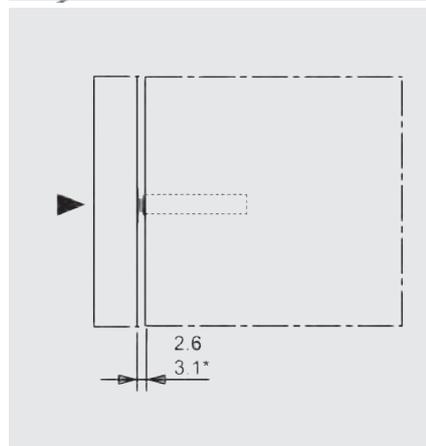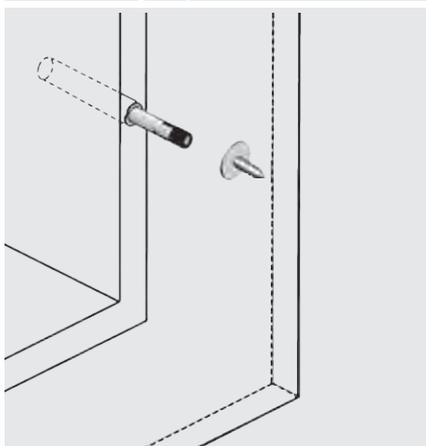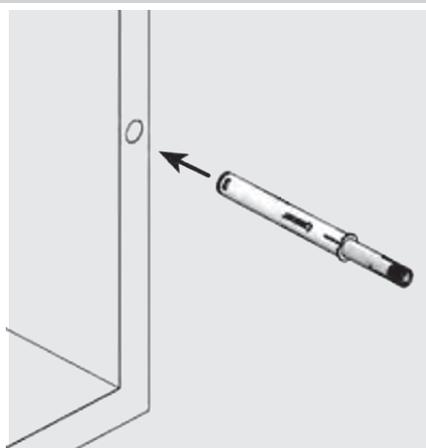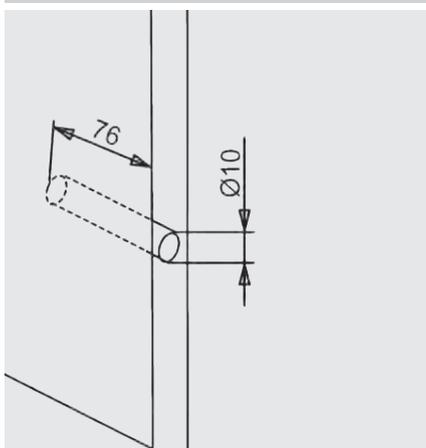

(*) Valid only for dowel applications.






- Used with unsprung or reverse sprung hinges
- Minimum gap 2.6 mm.
- Assembling errors -1.5 $+4$ mm.
- It can be assembled by drilling on face of cabinet.




**Push-Open Adapter
For Long Latch**

Colour	Packing	Code
Grey	Each	10299921

Push-Open Adjustable Adapter of Inside Cabinet "For Long Latch"

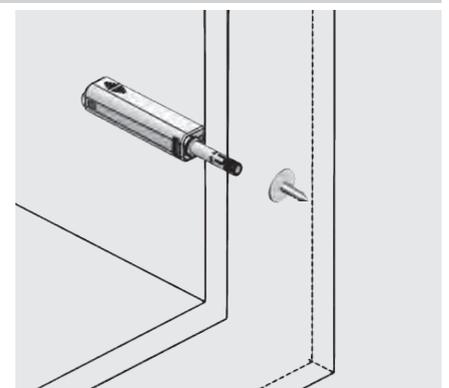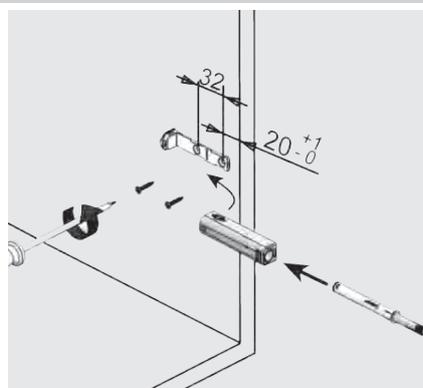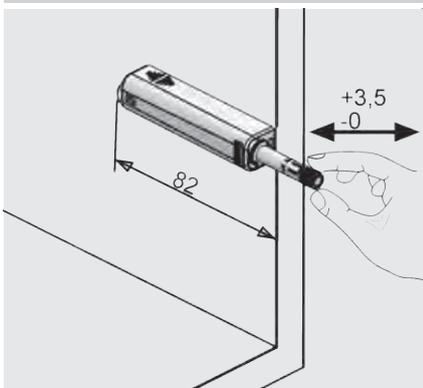

Push-Open Adjustable Adapter of Inside Cabinet "For Long Latch"

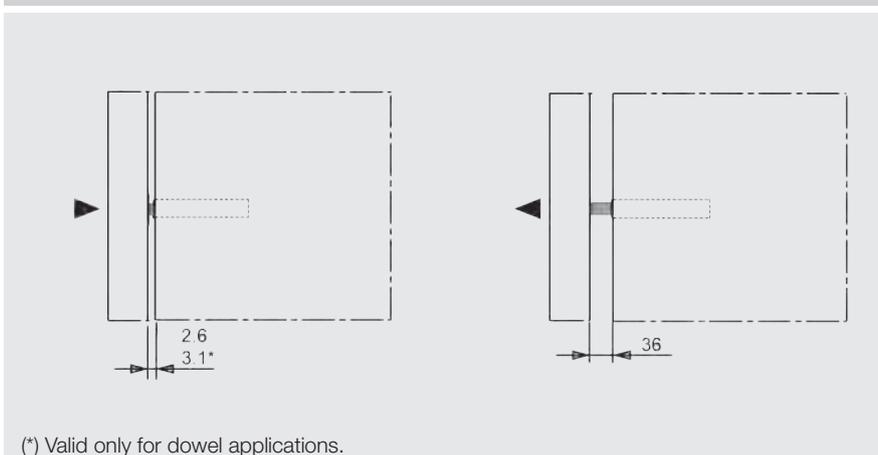

(*) Valid only for dowel applications.